

WELLS CARGO

Built The Way You Want It

**CONCESSIONS
TICKET BOOTHS
LINE-UPS**



**You Pick
The Options.
We Put Them On
The Toughest Body
In The Business.**

**WELLS
CARGO**

TM

8' WIDE CONCESSION TRAILERS (CEW SERIES)

CEW SERIES - FOR CONCESSIONS

The Wells Cargo **CEW** Series is our heavy-duty workhorse for the full-time concessionaire. Since we custom build on a production line basis, value is a standard feature. You get a top-notch trailer with the options you want at a great price. The service life of a CEW Series is outstanding, too – at least 15 years. We have the mail to prove it!



**16' Concession
Model CEW162**

BASIC MODEL SPECIFICATIONS:

Body Width: 8'
Lengths: 12' to 32'
Interior Height: 6'6"
Torflex® Axles: Tandem

POPULAR OPTIONS:

- Awnings
- Recessed Floor
- Stabilizer Jacks
- Removable A-Frame

STANDARD FEATURES:

- Electric Brakes
- Breakaway Switch & Battery
- Torflex® “Rubber Ride” Suspension
- Tandem 4” Drop Axles
- Radial Tires with Silver Spoke Wheels
- 12 Volt Trailer End Connector
- Fiberglass End Caps
- Jack Ram Hoist with Sand Pad
- 2 5/16” Ball Coupler Hitch
- .030 Prefinished Aluminum Exterior Skin (11 colors)
- 5/16” Safety Chains with Slip Hooks to D.O.T. Standards
- 1/4” Plywood Interior Sidewall Lining
- 3/4” Exterior Grade Plywood Floor
- Corrosion Resistant Compound (CPC) Undercoating on Chassis
- 32” Wide Entry Door
- D.O.T. Exterior Lighting & Reflectors

7' WIDE CONCESSION TRAILERS (CLW SERIES)

CLW SERIES - FOR CONCESSIONS

The **CLW** Series combines quality and economy into one ready-to-roll package. Although a little smaller than the **CEW** Series, the **CLW** Series has most of the same features and all the same craftsmanship. We'll put our 45+ years of customizing experience to work for you. Count on it!



**12' Concession
Model CLW122**

BASIC MODEL SPECIFICATIONS:

Body Width: 7'
Lengths: 12' to 16'
Interior Height: 6'6"
Torflex® Axles: Single or Tandem

POPULAR OPTIONS:

- Awnings
- Laminated Counters
- Stabilizer Jacks
- Removable A-Frame

STANDARD FEATURES:

- Electric Brakes
- Breakaway Switch & Battery
- Torflex® "Rubber Ride" Suspension
- 4" Drop Axles (Single or Tandem)
- Radial Tires with Silver Spoke Wheels
- 12 Volt Trailer End Connector
- Fiberglass End Caps
- Jack Ram Hoist with Sand Pad
- 2" (Single Axle) or 2 5/16" (Tandem Axle) Ball Coupler Hitch
- .030 Prefinished Aluminum Exterior Skin (11 colors)
- 5/16" Safety Chains with Slip Hooks to D.O.T. Standards
- 1/4" Plywood Interior Sidewall Lining
- 3/4" Exterior Grade Plywood Floor
- Corrosion Resistant Compound (CPC) Undercoating on Chassis
- 32" Wide Entry Door
- D.O.T. Exterior Lighting & Reflectors

LINE-UPS & TICKET BOOTHS

CEW SERIES: FOR LINE-UPS

Are games, novelties, or souvenirs your business? With our impressive list of job-proven options and customizing ability, we can build the perfect trailer for the job. There's no limit to the different configurations available.



TICKET BOOTH

The mobile Ticket Booth trailer (not shown), model TB101-8, is an effective way to move folks down the line. This unit comes standard with a "package" of convenient options including 3 window stations and 5 talk holes. Contact your local Wells Cargo dealer for more information.



**24' Line-Up
Model CEW242**

BASIC MODEL SPECIFICATIONS:

Body Width: 8'
Lengths: 12' to 32'
Interior Height: 6'6"
Torflex® Axles: Tandem

POPULAR OPTIONS:

- Awnings
- Recessed Floor
- Laminated Counters
- Power Assist Awning Rods

STANDARD FEATURES:

- Electric Brakes
- Breakaway Switch & Battery
- Torflex® "Rubber Ride" Suspension
- Tandem 4" Drop Axles
- Radial Tires with Silver Spoke Wheels
- 12 Volt Trailer End Connector
- Fiberglass End Caps
- Jack Ram Hoist with Sand Pad
- 2 5/16" Positive Lock Ball Coupler
- .030 Prefinished Aluminum Exterior Skin (11 colors)
- 5/16" Safety Chains with Slip Hooks to D.O.T. Standards
- 1/4" Plywood Interior Sidewall Lining
- 3/4" Exterior Grade Plywood Floor
- Corrosion Resistant Compound (CPC) Undercoating on Chassis
- 32" Wide Entry Door
- D.O.T. Exterior Lighting & Reflectors

OPTIONS



Options Shown Left Include:

- Vinyl Linoleum Floor
- White Kemplite® Sidewalls & Ceiling
- Formica® Laminated Counter
- Cabinets with Doors & Latches (Full Width Hinge)
- Stainless Steel, 4 Compartment Sink (Straight)
- Screen for Entry Door
- Radius Tinted Window
- Wall Switches
- Duplex GFI Wall Receptacle
- Fluorescent Lights
- Service Panel
- 25 ft. Shoreline
- Cable Slot with Brush Seal
- Wiring Package For Exterior Lights



Options Shown Left Include:

- Vinyl Linoleum Floor
- White Kemplite® Sidewalls & Ceiling
- Formica® Laminated Counter
- Type "A" Service Windows (3 sides)
- Overhead Shelves
- Duplex Wall Receptacle
- Fluorescent Lights
- Roof Vent
- Exterior Fold-Up Counter
- Formica® Laminated Counter
- Cabinets with Doors & Latches (Full Width Hinge)



Options Shown Left Include:


- Formica® Laminated Counter
- Vinyl Linoleum Floor
- White Kemplite® Sidewalls
- Duplex Wall Receptacle
- Regular Awnings
- Sliding Awning Rods

More Optional Items (not shown):

- Windows (all types)
- Sinks (all types)
- Stabilizer Jacks (all types)
- Sign-Type Awnings with Plexiglass & Backlight
- Recessed Floor
- Fender Skirts
- Removable 2-Piece A-frame Hitch
- Bally Cloth

SPECIFICATIONS - CLW

CLW Series Dimensions

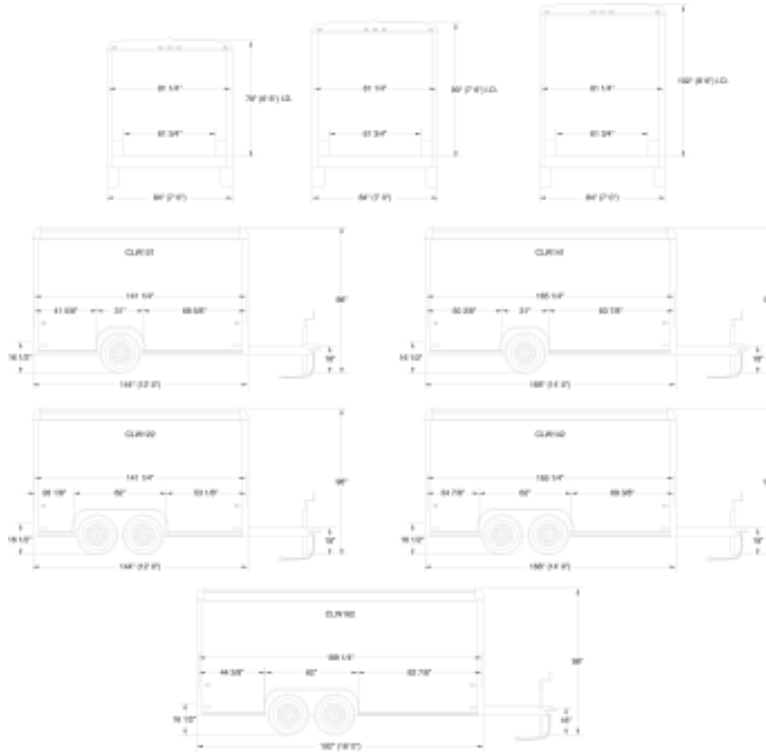


CLW Series Specifications

MODEL	CLW121	CLW141	CLW122	CLW142	CLW162
OVERALL:					
LENGTH (Body)	12'0"	14'0"	12'0"	14'0"	16'0"
WIDTH (Body)	7'0"	7'0"	7'0"	7'0"	7'0"
HEIGHT	8'2"	8'2"	8'2"	8'2"	8'2"
INTERIOR:					
LENGTH	11'9 1/4"	13'9 1/4"	11'9 1/4"	13'9 1/4"	15'9 1/4"
WIDTH	6'9 1/4"	6'9 1/4"	6'9 1/4"	6'9 1/4"	6'9 1/4"
HEIGHT	6'6"	6'6"	6'6"	6'6"	6'6"
PLATFORM HEIGHT	16 1/2"	16 1/2"	16 1/2"	16 1/2"	16 1/2"
AXLE:					
QUANTITY	Single	Single	Single	Single	Single
TYPE	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop
SUSPENSION	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®
RADIAL TIRE SIZE	ST175/80R13	ST175/80R13	ST175/80R13	ST175/80R13	ST175/80R13
LOAD RANGE	C	C	C	C	C
WHEEL BOLT PATTERN	5	5	5	5	5
HITCH BALL SIZE	2"	2"	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "
HITCH TO TOP OF BALL	18"	18"	18"	18"	18"
HITCH WEIGHT (lb.)	*	*	*	*	*
CURB WEIGHT (lb.)	1350	1450	1440	1600	1720
GVWR (lb.)	2900	2900	5800	5800	5800
ENTRY DOOR WIDTH:	32"	32"	32"	32"	32"

*Empty Hitch Weight Equals 10 - 15% Of Curb Weight Depending On Chosen Options.

SPECIFICATIONS - CEW

CEW Series Dimensions

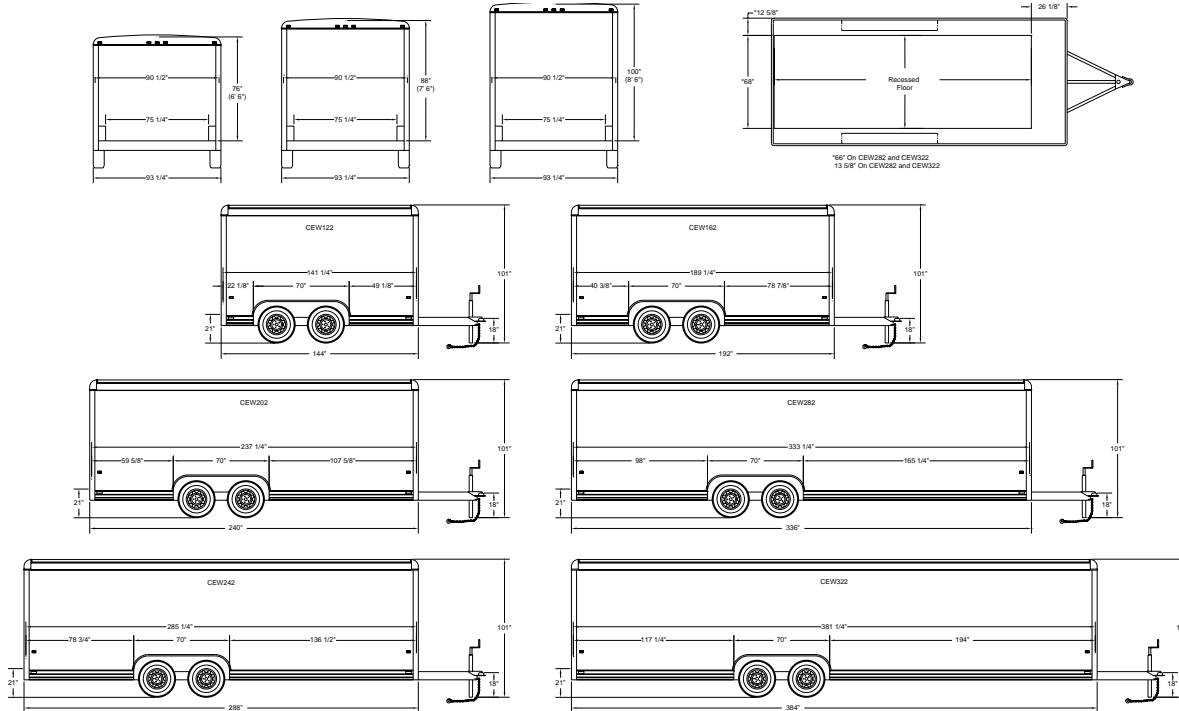

CEW Series Specifications

MODEL	CEW122	CEW162	CEW202	CEW242	CEW282	CEW322
OVERALL: LENGTH (Body)	12'0"	16'0"	20'0"	24'0"	28'0"	32'0"
WIDTH (Body)	8'0"	8'0"	8'0"	8'0"	8'0"	8'0"
HEIGHT	8'5"	8'5"	8'5"	8'5"	8'5"	8'5"
INTERIOR: LENGTH	11'9 ¹ / ₄ "	15'9 ¹ / ₄ "	19'9 ¹ / ₄ "	23'9 ¹ / ₄ "	27'9 ¹ / ₄ "	31'9 ¹ / ₄ "
WIDTH	7'6 ¹ / ₂ "	7'6 ¹ / ₂ "	7'6 ¹ / ₂ "	7'6 ¹ / ₂ "	7'6 ¹ / ₂ "	7'6 ¹ / ₂ "
HEIGHT	6'6"	6'6"	6'6"	6'6"	6'6"	6'6"
PLATFORM HEIGHT	21"	21"	21"	21"	23"	23"
AXLE: QUANTITY	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
TYPE	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop	4" Drop
SUSPENSION	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®	Torflex®
RADIAL TIRE SIZE	ST225/75R15	ST225/75R15	ST225/75R15	ST225/75R15	ST225/75R15	ST225/75R15
LOAD RANGE	D	D	D	D	D	D
WHEEL BOLT PATTERN	6	6	6	6	6	6
HITCH BALL SIZE	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "	2 ⁵ / ₁₆ "
HITCH TO TOP OF BALL	18"	18"	18"	18"	20"	20"
HITCH WEIGHT (lb.)	*	*	*	*	*	*
CURB WEIGHT (lb.)	2350	2550	2740	3100	4043	4419
GVWR	8000	8000	8000	8000	8000	8000
ENTRY DOOR WIDTH:	32"	32"	32"	32"	32"	32"

*Empty Hitch Weight Equals 10 - 15% Of Curb Weight Depending On Chosen Options.

Quality Construction — Always One Step Ahead



12 Volt Electrical System

All circuits distributed from junction box inside trailer. Easy access to all circuitry. No hidden splices. SAE truck/trailer color coded wire.



Wet Cell Battery

Essential part of breakaway system. Applies trailer's full braking capacity for a minimum of 15 minutes meeting D.O.T. requirements. Low voltage indicator light. Up to 100 recharges.



Hitch & Safety Chains

Positive lock ball coupler hitch with replaceable "Locking Dog" type latch that will not engage hitch ball unless properly seated in the coupler. Extra strong proof coil safety chains with hooks to D.O.T. standards. Safety chains are welded to A-frame with a special joining link. 7-way, 12-Volt male connector.



12 Volt Electrical System

All 12 volt wiring is completely weather protected with no direct exposure to the elements or road hazards. Starting at the sealed A-frame junction box, the molded, 4-wire cable is routed inside the tubular main rail. All brake wiring is run through a plastic conduit into a special welded channel on the axle.




Exterior Lighting

Clearance light, tail lights, brake lights and turn indicators meet strict D.O.T. requirements. Molded wiring harness. Easy to replace. Sealed Beam Tail Lights with extra durable polycarbonate "Diamond Shell" Lens.




Anodized Roof Cove & Bottom Trim

Extruded aluminum Roof Cove (with drip rail) provides extra body support and solid anchoring for roof and prefinished aluminum skin. Special anodizing process assures cove and trim will maintain their "like-new" luster for years with minimal maintenance.



Superior Frame Construction

A Wells Cargo frame is a product of the industry's best engineering and designed to provide over 15 years of daily service. Heavy-duty tubular steel main rails and full height C-channel crossmembers deliver commercial grade durability. Radius steel corner posts, front and rear, extend to the bottom of the frame providing the maximum welding surface possible.



Torflex® Rubber Ride Axles with E-Z Lube Hubs

Equipped with Torflex® rubber torsion suspension system with progressive torque action and independent wheel movement for maximum shock absorption and road stability. E-Z Lube hubs with outside grease fittings for bearing lubrication without disassembly. E-Coated wheels and brand name tires.



Corrosion Preventive Measures

To ward off the damaging effects of rust a Wells Cargo chassis is protected with a laboratory tested, Corrosion Resistant Compound (CPC) undercoating. All exposed steel is painted with a state-of-the-art process including both a primer & urethane topcoat for a smooth, long lasting finish. Also, a special corrosion resistant tape is applied between the steel frame and exterior aluminum skin to prevent electrolysis.



**Never Look Back
Warranty Program**

Solid Support Down The Road

After you make the decision to buy a Wells Cargo, our commitment to you is not over. Our comprehensive 6-Year Warranty Program is more than just words. It's about how quickly and responsibly we respond to your needs. It's the peace-of-mind you get knowing that your investment is protected by an established company with a solid reputation.

Specifications and features subject to change without notice.

PLANT LOCATIONS

Elkhart, Indiana
Waco, Texas
Ogden, Utah
Phoenix, Arizona
Waycross, Georgia
Carbondale, Pennsylvania



(800) 348-7553

CORPORATE OFFICE

1503 W. McNaughton St.
PO Box 728
Elkhart, IN 46515-0728
Phone: (574) 264-9661
Fax: (574) 264-5938
Web: www.wellscargo.com

AUTHORIZED WELLS CARGO DEALER